


Item Number 885nm 400um Fiber-coupled Module **Item Description**

Pilot Production Phase ²

_	~~		_	R99	વ
		м.	$\vdash \Delta$	Puu	٠
				11133	

	Units	Lower Spec	Typical	Upper Spec
Optical				
CW Output Power	W		130	
Centroid Wavelength	nm	882	885	888
Spectral Width (FWHM)	nm			3.5
Slope Efficiency	W/A		16.5	
Beam Divergence from Fiber (90% PE)	NA		0.17	0.20
Fiber Core / Clad Diameter	μm		400 / 480	
Fiber NA / Index Type	· -	0.22 / PowerCore™		
Electrical				
Electrical-to-Optical Efficiency	%	49	55	
Threshold Current	Α		1.2	
Operating Current	Α		9.1	10.5
Operating Voltage	V		25.9	27.8
Series Resistance	Ω		0.3	
Mechanical				
Mass ⁷	g		190	
Fiber Length	m	1.9	2.0	2.1
Fiber Bend Radius (Active / Storage)	mm		75 / 65	
Fiber Jacketing	-	St	ainless Steel Square	lock
Fiber Termination	-		SMA	
Thermal				
Thermal Resistance ⁴	°C/W	0.17		
Waste Heat	W	105		
Operating Housing Temperature ⁶	°C	+25		
Wavelength Temperature Coefficient 5	nm / °C	İ	0.31	
Outline Drawing				

Outline Drawing

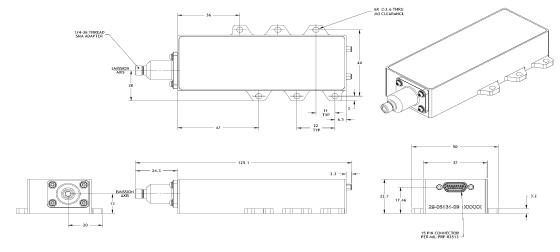

Notes

- ¹Production specifications shown are for beginning of life performance, end of life operating current (lop) is 120% beginning of life lop
- ²Current phase within nLIGHT's NPI (New Production Introduction) process
- ³Export Control Classification Number (ECCN) as defined by the Export Administration Regulations (EAR) ⁴Thermal resistance is the diode junction temperature shift per incremental Watt of heat load
- ⁵The wavelength temperature coefficient is the wavelength shift per °C change at the diode junction
- ⁶Operating temperature defined by the package housing. Acceptable operating range is 20 35C, but performance may vary

⁷Does not include mass of fiber

This product is not certified in accordance with IEC 60825-1 or 21CFR1040.10/21CFR1040.11 and is solely intended to be integrated into a laser product certified by the Purchaser. The Purchaser acknowledges that their product (incorporating the nLIGHT laser product) must comply with the applicable regulations before it can be sold.



Notice
nLIGHT continually improves its products to provide customers with outstanding quality and reliability, therefore may change certain specifications and product descriptions at any time, without notice. Additionly, nLIGHT offers a limited warranty to ensure customer satisfaction. For complete details, please contact an nLIGHT sales

RoHS



nLight Corporation 5408 NE 88th Street, Bldg E Vancouver, Washington 98665 United States of America

Phone: 866.202.4488 360.566.4460 360.546.1960 e-mail: sales@nlight.net Web: www.nlight.net