

nLIGHT Narrow Linewidth Amplifier | NLA-M




nLIGHT NLA-M Specifications

Specification	NLA-M-2.5
Optical	
Mode of Operation	CW
Typical Output Power	2.5 kW
Electrical-to-Optical Efficiency	> 38%
Operating Wavelength Range	1040 – 1080 nm
Minimum Seed Linewidth ¹	>25 GHz (Input Polarization State Scrambled)
Electrical	
Supply Input Voltage	Nominal 100V (60-125 VDC)
Control Interface	Ethernet/RS-485
Mechanical	
Dimensions, W x D x H	20.0 x 13.1 x 2.25 in ³
Mass	< 11.0 kg
Coolant	Water, PGW/EGW
Fiber length and termination options	Contact nLIGHT for standard options
Environmental	
Inlet coolant temperature range ²	15 – 40°C
Flow Rate	1.0 GPM

1. 40GHz under polarization control and with worst case input polarization. White Noise Source used to broaden MO linewidth.
2. Rated efficiency at 25°C nominal temperature. There is a power penalty of approximately 10% at 40°C.

nLIGHT Narrow Linewidth Amplifier | NLA-M

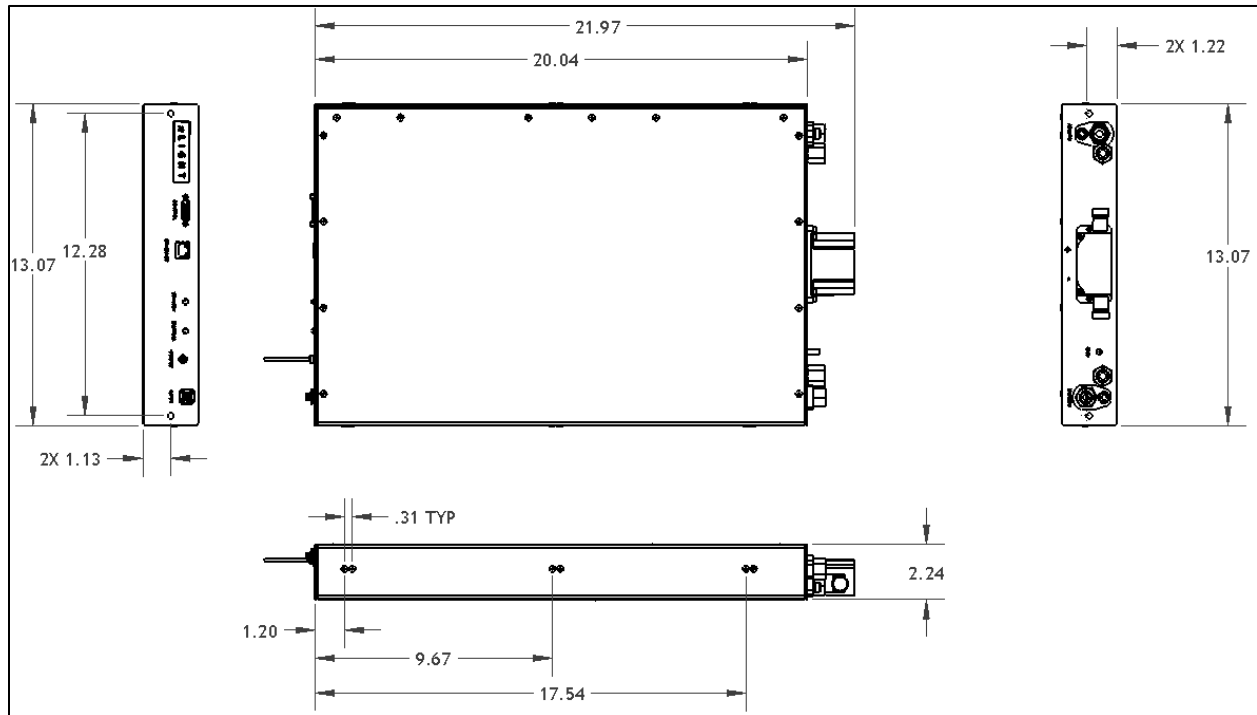

Laser Safety

This laser product does NOT comply with IEC 60825-1 or 21CFR1040.10/21CFR1040.11 and is solely intended to be integrated into a laser product certified by the Purchaser. The Purchaser acknowledges their product must comply with application regulations before it can be sold to an end user.



nLIGHT continually improves its products to provide customers outstanding quality and reliability. The information contained herein is subject to change without notice. nLIGHT, Inc. shall not be liable for technical or editorial errors or omissions contained herein. Warranties are set forth in express warranty statements accompanying products. Nothing herein should be construed as constituting an additional warranty. For details, please contact your nLIGHT sales representative.

sales@nlight.net | www.nlight.net

